DOMUS

WINNING THE FUTURE THROUGH INNOVATION

DTT2-11/18 STACK DYNAMIC TUMBLE DRYERS

TOUCH II

User friendly and totally programmable 4'3" Touch II
USB Connection. PC software free of charge for programming, traceability, data analysis…
Videos on display (ads, instructions, etc.)
37 languages

OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard

EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter

VERSATILITY

Make to order - customisation
WET CLEANING
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses

CONNECTIVITY

Remote technical service
Managemnt of laundries: OPL and COIN
Remote payment

ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters

MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance

OTHERS

Grey skinplate outer casing, stainless steel look
Transmission by direct drive
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Heating options: electric, gas
CE approved

OPTIONS

- EFFICIENT DRY - Intelligent humidity control. Temperature probe at drum inlet.
- Double door glass
- SFEX - Integrated Fire Extinguishing System
- Exhaust silencer Ø200
- Printer kit
- DomusConnect communication kit
- Tropicalized model
- Rear panel external air + filter
- Stainless steel AISI 304 outercasing
- Stainless steel AISI 304 frontal panel
- Stainless steel battery
- Wooden packing
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

domus@domuslaundry.com | www. domuslaundry.com | export@domuslaundry.com

TECHNICAL DATA	UNIT.	DTT2-11		DTT2-18		DTT2-18 G TURBO
CAPACITY						
Capacity 1/18	Kg	23		37		37
Capacity 1/20	Kg	22		34		34
Hourly Output*	Kg/h	36		53		76
Evaporation capacity*	l/h	16,5		18,6		38
DRUM						
Ø Drum	mm	750		750		750
Ø Door	mm	574		574		574
Door center height	mm	547/1.522		547/1.522		547/1.522
Load hole bottom height	mm	260/1.235		260/1.235		260/1235
Drum length	mm	475		746		746
Drum volume	l	210		330		330
POWER						
Drum motor power	Kw	0,37x2		0,37x2		0,37x2
Fan motor power STACK DYNAMIC	Kw	0,25x2		0,25x2		0,55x2
Electric heating power ALL RANGES	Kw	12x2		12x2		-
Total electric power (elec.model) STACK DYNAMIC	Kw	25,34		25,34		-
Gas heating power ALL RANGES	Kw	12x2		12x2		24x2
Total electric power (gas model) STACK DYNAMIC	Kw	1,34		1,34		1,94
CONNECTIONS		ELECTRIC.	GAS	ELECTRIC.	GAS	GAS
Tension 230V - I + N + T	N° x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A	3 x 1,5 / 20A
Tension 230V - III + T	N° x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A	3 x 1,5 / 20A
Tension 400V - III + N + T	N° x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A	3 x 1,5 / 20A
DIMENSIONS / PACKING DIMENSIONS						
Net width / Gross width	mm	785/865		785/865		785/865
Net Depth / Gross Depth	mm	972/1.055		1.242 /1.325		-
Net Height / Gross Height	mm	1.980/2.126		1.980/2.126		1980/2126
Net weight / Gross weight	Kg	260/268		290/303		-
OTHERS						
Max airflow	m3/h	1000		1000		1500
Ø Fume exhaust	mm	200		200		200x2
Sound level	dB	64		64		64

* It may vary depending on the type of heating, filter cleanliness or extraction type.

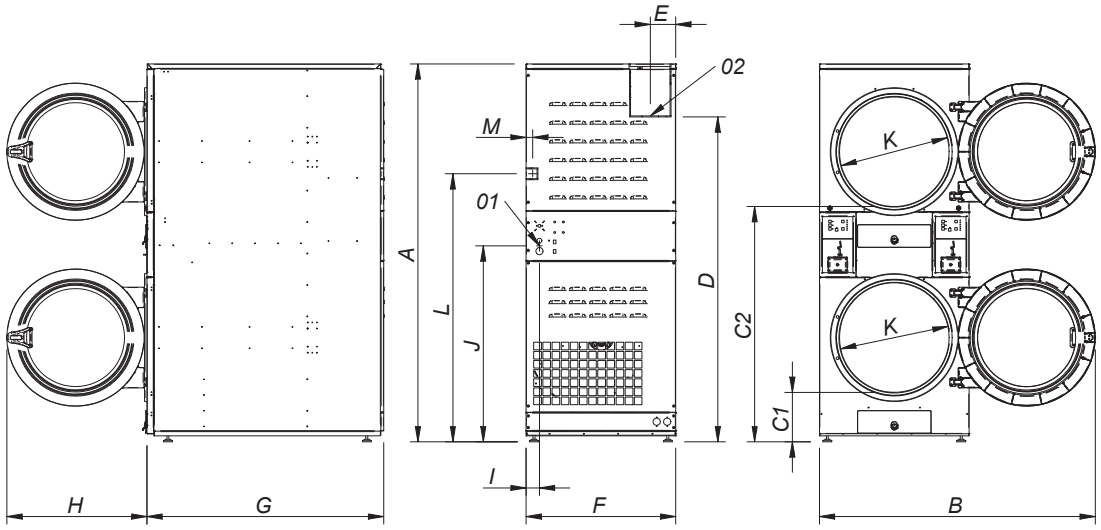

01 ELECTRIC CONNECTION
02 FUMES OUTLET Ø200

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
DTT2-11	1980	1447	259	1234	1620	135	785	972	735	64	1031	575	1406	35
DTT2-18	1980	1447	259	1234	1620	135	785	1242	735	64	1031	575	1406	35